

# NW 458 XSafe

## Modular Ice Machine 230 kg

Item #:
Project:
Quantity:



### FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Stackable: add flexibility!
- Head only ice maker: requires a separate storage bin to collect the ice produced.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



NW 458  
Dice 10 g  
W 22 x D 22 x H 22 mm



NW H 458  
Half Dice 6 g  
W 10 x D 22 x H 28 mm



NW L 458  
Large Dice 15 g  
W 28 x D 22 x H 28 mm

### CONDENSING SYSTEM

Air cooled  
Water cooled

### REFRIGERANT GAS

R404A  
R452A

### VOLTAGE V/Hz/ph

230/50/1

### RECOMMENDED BINS

Head	Bins		kg
NW 458	✓	<b>SB393</b>	181
	✓	<b>SB530</b>	243
	CBT48EAMCD CBT48FMCD	<b>SB948</b>	406

#### LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)


Modular Ice Machine 230 kg

# NW 458 *XSafe*

## Modular Ice Machine 230 kg

Item #:
Project:
Quantity:

Modular Ice Machine 230 kg

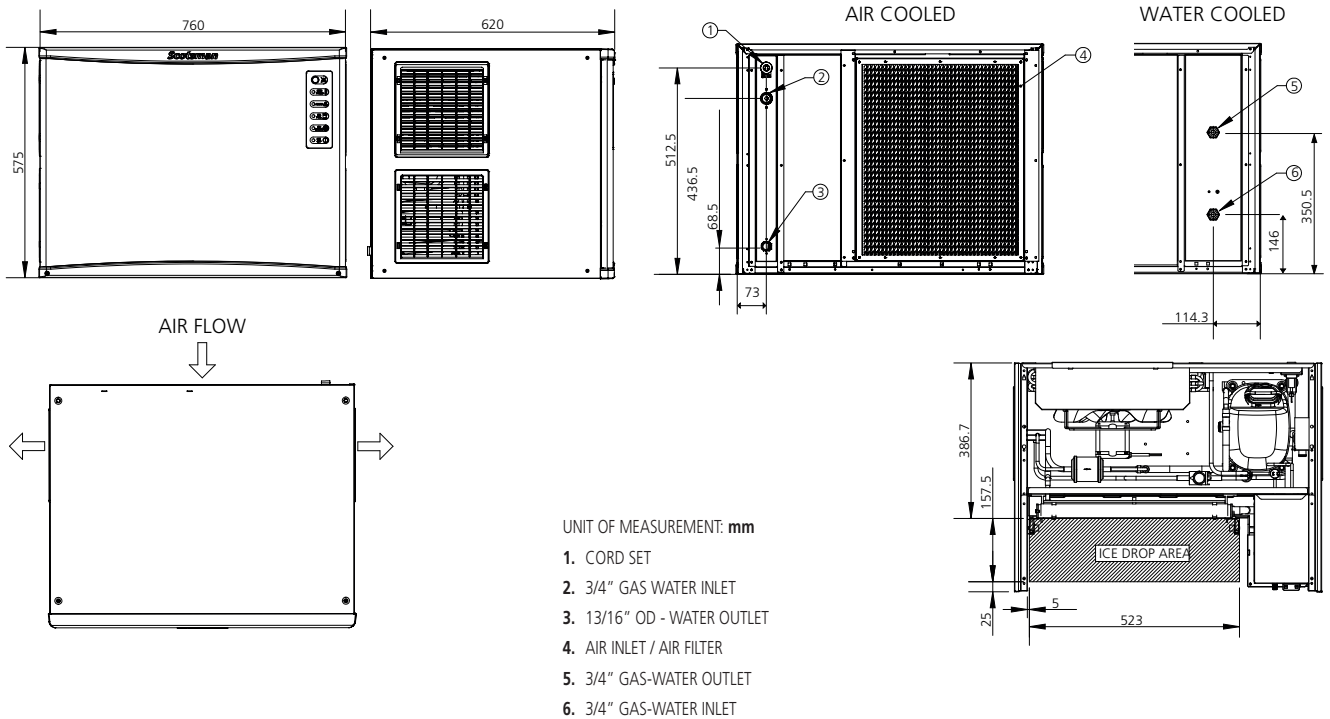

UNIT DATA		SHIPPING DATA		(*) Data refer to 32°C Amb. / 21°C Water temperature conditions							
Size (W x D x H)		760 x 620 x 575 mm		Carton (W x D x H)		830 x 690 x 720 mm					
Net weight		73 kg		Weight		87 kg					
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm <sup>2</sup>	A
NWH 458 AS	230/50/1	240	230	175	13.2	23.1	11.4	1000	2600	3 x 1.5	16
NWH 458 WS	230/50/1	230	230	180	9.9	17.9	84.3	1000	2600	3 x 1.5	16
NWL 458 AS	230/50/1	230	210	155	14.8	22.9	9.4	1000	2600	3 x 1.5	16
NWL 458 WS	230/50/1	230	215	180	9.9	17.9	84.3	1000	2600	3 x 1.5	16
NW 458 AS	230/50/1	230	210	165	13.9	22.9	10.6	1000	2600	3 x 1.5	16
NW 458 WS	230/50/1	230	220	190	9.5	18.0	89.0	1000	2600	3 x 1.5	16